



Touch keypad with LED display

Security, Beauty & Comfort All in Your Hands

Dual networks, double the security

Touch keypad with LED display


Controlled by free App on smart phone

Supports up to 30 sensors, 10 remotes and unlimited cameras*

6 emergency numbers for remote listening

No monitoring fees

*Subject to bandwidth each camera requires a min of 2 Mbits per second per camera

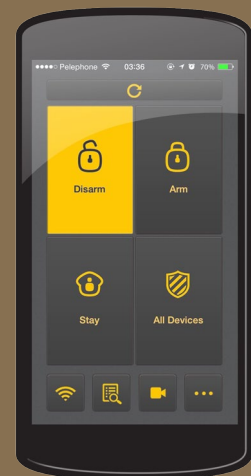

www.smanos.com

© 2015, Smanos, Inc.

WiFi/PSTN Alarm System

18-W100

W100

WiFi/PSTN Alarm System

smanos[®]
Dream Big. Live Smart.

1 of 4 Specifications for item # W100 system		2 of 4 Specifications for item # W100 system	
Description:	WiFi / PSTN Alarm System	Description:	Door / Window Sensor
Item #:	W100	Item#	DS2300
Power Input	DC 12V 500mA	Power Supply	DC 3V (CR2032 button cell battery x 2)
Static Current	≤ 100mA	Static Current	≤ 1 uA
Alarm Current	≤ 250mA	Alarm Current	≤ 10.5 mA
Backup Battery/Life:	Li-ion 3.7V 1200mAh / 12hrs.	Transmitting Distance	≤ 80 m (open area/no interference)
Internal Siren Volume:	110dB	Radio Frequency	915 MHz (±75KHz)
Supported Accessories	10 Remotes, 30 Accessories	Housing Material	ABS plastic
Radio Frequency	915MHz	Operation Condition	Temperature 14° F to 131° F (-10°C ~ +55°C)
Wireless Interface	Wi-Fi IEEE 802.11 b/g/n	Relative Humidity	≤80% (Non-condensing)
PSTN Interface	Analog (back-up)	Transmitter Dimensions (L x W x H)	72 x 28 x 10 mm
Supported applications	Google Play, Apple Store	Magnet Dimensions (L x W x H)	58 x 14 x 9.5 mm
Housing Material:	ABS Plastic		
Operation Condition	Temperature 14° F to 131° F (-10°C ~ +55°C)	3 of 4 Specifications for item # W100 system	
Relative Humidity	≤ 80% (non-condensing)	Description:	Remote Controls
Dimensions (LxWxH)	5.46" x 4.92" x 4.94" inches	Item#	RE2300
Warranty	1 year	Power Supply	DC 3V (CR2032 button cell battery x 1)
UPC (item)	859756005001	Transmit Current	≤ 9.5 mA
		Transmit Distance	≤ 80 m (open area/no interference)
Package contents:	Quantity:	Radio Frequency	915 MHz (±75KHz)
Control Base Unit	1	Housing Material	PC Plastic
Remote Control	2	Operation Condition	Temperature 14° F to 131° F (-10°C ~ +55°C)
Door/Window sensor	1	Relative Humidity	≤80% (Non-condensing)
PIR Motion Sensor	1	Dimensions (LxWxH)	71 x 38 x 12 mm
AC Adapter	1		
Double-sided tape	4	4 of 4 Specifications for item # W100 system	
Screw Kit	1	Description:	PIR Motion Sensor
Window Warning Decal	3	Item#	MD2300
User Guide	1	Power Supply	DC 3V (1.5V AA battery x 2)
		Static Current	≤ 50 uA
		Alarm Current	≤ 11 mA
		Detection Scope	8m/110°
		Transmitting Distance	≤ 80 m (open area/no interference)
		Radio Frequency	915 MHz (±75KHz)
		Housing Material	ABS plastic
		Operation Condition	Temperature 14° F to 131° F (-10°C ~ +55°C)
		Relative Humidity	≤80% (Non-condensing)
		Detector Dimensions (L x W x H)	101.5 x 59 x 37.5 mm
		Bracket Dimensions (L x W x H)	60 x 29 x 27 mm



daveco[®]

DNPR420

Exclusive Canadian Distributor:

5720 Ferrier, Montreal, Qc, Canada, H4P 1M7

Tel.: (800) 461-2112 ♦ Fax.: (514) 342-7876 ♦ info@davecohi-fi.com

smanos[®]

18-W100