



## Security Simplified

Plug & Play, setup in minutes

Controlled by free App on smart phone

Supports up to 30 sensors, 10 remotes and unlimited cameras\*


Battery backup alarm in case of power outage

No monitoring fees

\*Subject to bandwidth each camera requires a min of 2 Mbits per second per camera



[www.smanos.com](http://www.smanos.com)

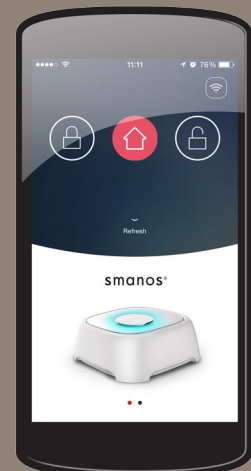

© 2015, Smanos, Inc.

# daveco<sup>®</sup>

DNPR422

Exclusive Canadian Distributor:

5720 Ferrier, Montreal, Qc, Canada, H4P 1M7

Tel.: (800) 461-2112 ♦ Fax.: (514) 342-7876 ♦ [info@davecohiFi.com](mailto:info@davecohiFi.com)

# smanos<sup>®</sup>

# 18-W020

## W020 WiFi Alarm System

**smanos**<sup>®</sup>  
Dream Big. Live Smart.

| 1 of 3 Specifications for item # W020 system |   | 2 of 3 Specifications for item # W020 system        |   |
|--|---|---|---|
| <b>Description:</b>                          | <b>WiFi Alarm System</b>                    | <b>Description:</b>                                 | <b>Door / Window Sensor</b>                 |
| Item #:                                      | W020  | Item#   | DS2300                                      |
| Power Input                                  | DC12V 500mA                                 | Power Supply  | DC 3V (CR2032 button cell battery x 2)      |
| Battery                                      | AA 1.5V LR6 x 4pcs                          | Static Current                                      | ≤ 1 uA                                      |
| Standby Current                              | <140mA                                      | Alarm Current                                       | ≤ 10.5 mA                                   |
| Alarm Current                                | <270mA                                      | Transmitting Distance                               | ≤ 80 m (open area/no interference)          |
| Internal Siren                               | 105dB (High Volume)                         | Radio Frequency                                     | 915 MHz (±75KHz)                            |
| Expandable Accessories                       | 10 Remotes, 30 Accessories                  | Housing Material                                    | ABS plastic                                 |
| Radio Frequency                              | 915MHz                                      | Operation Condition                                 | Temperature 14° F to 131° F (-10°C ~ +55°C) |
| Wireless Interface                           | Wi-Fi IEEE 802.11 b/g/n                     | Relative Humidity                                   | ≤80% (Non-condensing)                       |
| Housing Material:                            | ABS Plastic                                 | Transmitter Dimensions (L x W x H)                  | 72 x 28 x 10 mm                             |
| Operation Condition                          | Temperature 14° F to 131° F (-10°C ~ +55°C) | Magnet Dimensions (L x W x H)                       | 58 x 14 x 9.5 mm                            |
| Relative Humidity                            | ≤ 80% (non-condensing)                      |   |   |
| Supported applications                       | Google Play, Apple Store                    | <b>3 of 3 Specifications for item # W020 system</b> |   |
| Dimensions (LxWxH)                           | 117 x 118.5 x 40.5mm                        | <b>Description:</b>                                 | <b>Remote Control</b>                       |
| Warranty                                     | 1 Year                                      | Item#   | RE2300                                      |
| UPC (item)                                   | 859756005063                                | Power Supply  | DC 3V (CR2032 button cell battery x 1)      |
| <b>Package contents:</b>                     | <b>Quantity:</b>                            | Transmit Current                                    | ≤ 9.5 mA                                    |
| Control Base Unit                            | 1   | Transmit Distance                                   | ≤ 80 m (open area/no interference)          |
| Remote Control                               | 1   | Radio Frequency                                     | 915 MHz (±75KHz)                            |
| Door/Window sensor                           | 2   | Housing Material                                    | PC Plastic                                  |
| Double-sided tape                            | 2   | Operation Condition                                 | Temperature 14° F to 131° F (-10°C ~ +55°C) |
| AC Adapter                                   | 1   | Relative Humidity                                   | ≤80% (Non-condensing)                       |
| Battery (AA)                                 | 4   | Dimensions (LxWxH)                                  | 71 x 38 x 12 mm                             |
| Window Warning Decal                         | 3   |   |   |
| User Guide                                   | 1   |   |   |
| Warranty                                     | 1   |   |   |

