




Omage speaker wire goes to almost any length to please. Well sheathed and flexible 12, 14, 16 and 18-gauge wire is available on easy-to-handle 30, 50, 100 and 500-foot spools.

Speaker wire

- Very flexible
- 12, 14, 16 and 18-gauge wire
- 30, 50, 100 and 500-foot spools
- 99.9% oxygen-free multi-stranded copper wire with extra thick clear jacket

CLEAR JACKET SPEAKER WIRE

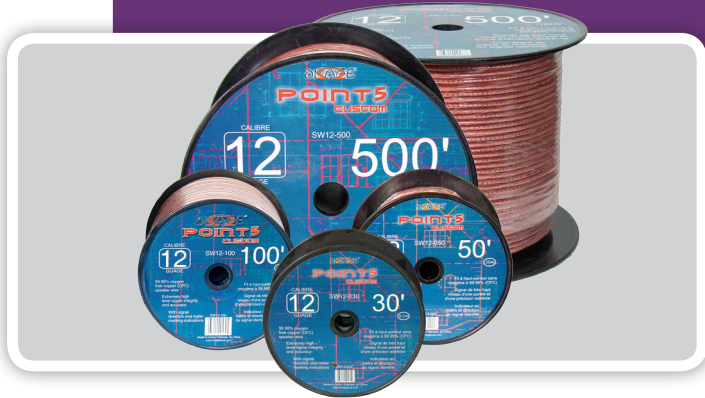

Model	Conductor	Gauge	Length ft / m
SW12-030	2	12	30 (9)
SW12-050	2	12	50 (15)
SW12-100	2	12	100 (30)
SW12-500	2	12	500 (150)

Model	Conductor	Gauge	Length ft / m
SW14-030	2	14	30 (9)
SW14-050	2	14	50 (15)
SW14-100	2	14	100 (30)
SW14-500	2	14	500 (150)

Model	Conductor	Gauge	Length ft / m
SW16-030	2	16	30 (9)
SW16-050	2	16	50 (15)
SW16-100	2	16	100 (30)
SW16-500	2	16	500 (150)

Model	Conductor	Gauge	Length ft / m
SW18-050	2	18	50 (15)
SW18-100	2	18	100 (30)
SW18-500	2	18	500 (150)

Fire Rated In-Wall Speaker Wire



Omage CL3 speaker wire is recognized and approved to meet Canadian and American regulations for use in residential and commercial construction. Each comes in an easy pull box and has meter markings for tallying usage.

CL3 RATED SPEAKER WIRE



Longer FT4-12 is available in white only

Model	Conductor	Gauge	Length ft / m
FT4-12 x 2-150	2	12	500 (150)
FT4-12 x 4-75	4	12	250 (75)

Longer FT4-14 is available in white only

Model	Conductor	Gauge	Length ft / m
FT4-14 x 2-150	2	14	500 (150)
FT4-14 x 4-150	4	14	500 (150)

Fire rated speaker wire

- Easy-pull dispenser box
- Length indications marked every two feet
- Multi-strand, oxygen-free copper
- Two-conductor (black / red) or four-conductor (black / red / white / green)
- Nylon rip-cord, for easy jacket removal



FT4-16 is available in white and black

Model	Conductor	Gauge	Length ft / m
FT4-16 x 2-150	2	16	500 (150)
FT4-16 x 2-150N	2	16	500 (150)
FT4-16 x 4-150	4	16	500 (150)
FT4-16 x 4-150N	4	16	500 (150)
FT4-16 x 2-300		NLA	
FT4-16 x 2-300N		NLA	